TOWN OF YORKTOWN RAILROAD STATION PARK

COMMERCE STREET, YORKTOWN HEIGHTS, NEW YORK 10598



YORKTOWN HEIGHTS RAILROAD STATION

PLOT PLAN NOT TO SCALE



SYMBOL LEGEND

ITEM	SYMBOL
WALL TYPE	- w3
ROOM NUMBER/ WINDOW NUMBER	(A)
ROOM NUMBER/ DOOR NUMBER	
ELEVATION	41.35
WALL SECTION	L
REFERENCE TO DETAIL DRAWING	

SYMBOL EXTERIOR OR INTERIOR INTERIOR ELEVATIONS, MULTIPLE ACCESSIBLE ELEMENT

IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED ARCHITECT OR ENGINEER TO ALTER ANY ITEM IN ANY WAY WITHOUT

COMPLYING WITH THE REQUIREMENTS OF SECTION 7209, ARTICLE 147, PART 69.5(b) OF THE NEW YORK STATE EDUCATION LAW

REVISION SYMBOL

WALL TYPES

EXISTING WALL

DRAWING INDEX

CS-1 COVER SHEE

Restoration of E- I ELECTRICAL PLAN AND DETAILS Yorktown Heights

Railroad Station

TOWN OF

YORKTOWN

Railroad Station Park

Yorktown Heights, New York

Federal Aid Contract PIN 8780.26

ISSUED FOR BID

ISSUED FOR BID	04/02/18
REVISED/ISSUED FOR REVIEW 2	
REVISED/ISSUED FOR REVIEW	4/21/09
ISSUED FOR DEP/ SHPO	12/13/08
ISSUED FOR BID	12/13/07
ISSUED FOR REVIEW	08/17/07
ISSUED FOR REVIEW	08/02/07
Issue/Revision	Date

Date May 31, 2006

SEAL/ SIGNATURE

WSA Project No.

Sheet Title

9901.01

Cover Sheet

CS-1

Drawing No.

WORK ITEMS

01 1000 SPECIFIC REQUIREMENTS 01 3100 PROJECT MANAGEMENT AND COORDINATION OI 3300 SUBMITTALS

01 7329 CUTTING AND PATCHING SELECTIVE REMOVALS

MORTARS AND GROUTS UNIT MASONRY

METAL FABRICATIONS ROUGH CARPENTRY

ARCHITECTURAL WOODWORK THERMAL INSULATION

SHINGLES AND SHAKES

FLASHING AND SHEET METAL

WOOD WINDOWS

WOOD FLOORING RESTORATION PAINTING AND COATING

10 1400 HEATING STOVES

WATER-BASED FIRE-SUPPRESSION SYSTEMS

PLUMBING FIXTURES ELECTRICAL AND LIGHTING LIGHTNING PROTECTION

INTRUSION DETECTION FIRE DETECTION AND ALARM

ALTERNATIVES

ALT.01 RECONSTRUCT CHIMNEY IN ORIGINAL LOCATION ON EXISTING ORIGINAL FOOTING. ALT.02 RESTORE/REPLACE SILLS AT EAST ELEVATION AND FLOOR FRAMING AT AREAS INDICATED.

WOOD EXTERIOR CABINET AT NORTH ELEVATION TO MATCH DOCUMENTED ORIGINAL. DRY PIPE, PRE-ACTION FIRE PROTECTION SYSTEM, COMPLETE.

> PROFESSIONAL PHOTOGRAPHIC DOCUMENTATION OF ENTIRE PROJECT DURATION. THE CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT AS REQUIRED TO COMPLETE THE WORK.

> > THE CONTRACTOR SHALL SECURE AND PAY ALL NECESSARY PERMITS PRIOR TO STARTING THE WORK, INCLUDING ALL EXPEDITING COSTS.

THE CONTRACTOR SHALL PROPERLY PROTECT AND MAKE SAFE ADJACENT PROPERTIES AND OWNER'S PROPERTY AS JOB CONDITIONS

CONSTRUCTION AND CONSTRUCTION RELATED ACTIVITIES SHALL BE THOROUGHLY COORDINATED WITH THE OWNER.

THE CONTRACTOR SHALL MAKE ALL OPENINGS SEALED AND WEATHER TIGHT AT THE END OF EACH WORKDAY AND DURING INCLEMENT WEATHER.

ALL WORK SHALL BE IN ACCORDANCE WITH DOT STANDARD SPECS, VERSION JAN. 1, 2018, AND THE BID DOCUMENTS WHICH ARE THE PROPOSAL AND THE PLANS. THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AT THE JOB SITE PRIOR TO STARTING THE WORK, AND SHALL NOTIFY THE ARCHITECT OF ANY DISCREPANCIES, OMISSIONS, OR OTHER CONDITIONS THAT MAY AFFECT THE WORK IMMEDIATELY AND PRIOR TO BEGINNING REPAIRS IMPACTED BY THE NOTED CONDITIONS.

GENERAL NOTES

UNANTICIPATED CONDITIONS ENCOUNTERED DURING THE COURSE OF THE WORK, WHICH REQUIRE ADDITIONAL REPAIRS OR REQUIRE MODIFICATION OF CONTRACT REPAIRS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT AND THE OWNER ADDITIONAL ARCHITECT AND THE OWNER. NO ADDITIONAL REPAIR WORK SHALL BE PERFORMED UNLESS BROUGHT TO THE ATTENTION OF THE ARCHITECT AND APPROVED IN ADVANCE BY THE ARCHITECT AND THE OWNER.

THE DRAWINGS AND SPECIFICATIONS ARE TO BE TAKEN IN THEIR ENTIRETY AND AS A WHOLE. IF A DISCREPANCY IS FOUND BETWEEN THE DRAWINGS AND THE SPECIFICATIONS, THE ARCHITECT/ENGINEER AND OWNER WILL HAVE THE OPTION AS TO WHICH GOVERNS, PLEASE REFER TO NYSDOT SPECS SECTION 102-02-B.

THE CONTRACTOR SHALL BE SOLELY
RESPONSIBLE FOR ALL SITE SAFETY AND
METHODS AND MEANS OF CONSTRUCTION. THE
CONTRACTOR SHALL MAKE ANY INSPECTIONS OR
ANALYSIS NECESSARY TO VERIFY THAT EXISTING
BUILDING ELEMENTS HAVE ADEQUATE LOAD
CAPACITY TO SUPPORT ANY REQUIRED FORCES
HE/SHE CHOOSES TO IMPOSE ON THEM.

BUILDING DEPARTMENT NOTES

GENERAL: ALL WORK TO BE DONE IN ACCORDANCE WITH THE NEW YORK STATE BUILDING CODE (2015), CHAPTER 33, AND REGULATIONS OF ALL OTHER AGENCIES HAVING

BEFORE COMMENCING WORK, THE CONTRACTOR SHALL FILE ALL REQUIRED CERTIFICATES OF INSURANCE WITH THE DEPARTMENT OF BUILDINGS, OBTAIN A WORK PERMIT AND ANY OTHER REQUIRED PERMITS, AND PAY ALL FEES REQUIRED BY AUTHORITIES HAVING JURISDICTION.

ALL ADJOINING PROPERTY AFFECTED BY ANY OPERATIONS SHALL BE PROTECTED PER THE REQUIREMENTS OF SUB-CHAPTER 19 OF THE NEW YORK STATE BUILDING CODE.

4) NO CHANGE IN BUILDING USE GROUP, EGRESS, OR CONSTRUCTION TYPE.

5) PROJECT TO COMPLY WITH LOCAL NOISE ORDINANCE.

PROTECTION OF EXISTING PROPERTY

THE CONTRACTOR SHALL PROVIDE, ERECT, AND MAINTAIN ALL TEMPORARY BARRIERS AND GUARDS, AND ALL TEMPORARY SHORING AND BRACING, AS REQUIRED BY DEPARTMENT OF BUILDING RULES AND REGULATIONS.

THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE PROTECTION OF CONDITIONS AND MATERIALS WITHIN AND ADJACENT TO THE PROPOSED CONSTRUCTION AREA. THE CONTRACTOR SHALL DESIGN AND INSTALL ADEQUATE SHORING AND BRACING FOR ALL CONSTRUCTION OR REMOVAL TASKS.

THE CONTRACTOR SHALL HAVE SOLE
RESPONSIBILITY FOR ANY DAMAGE OR INJURIES
3) CAUSED BY OR DURING THE EXECUTION OF THE




Preservation, Planning & Sustainable Design

One Bridge Street-Suite One Irvington, New York 10533 914-591-1900 voice | 914-591-1999 fax www.ModernRuins.com

REVIEWED AND AUTHORIZED TO PROCEED

For the Town of Yorktown, New York

REVIEW AND AUTHORIZATION SIGNATURE

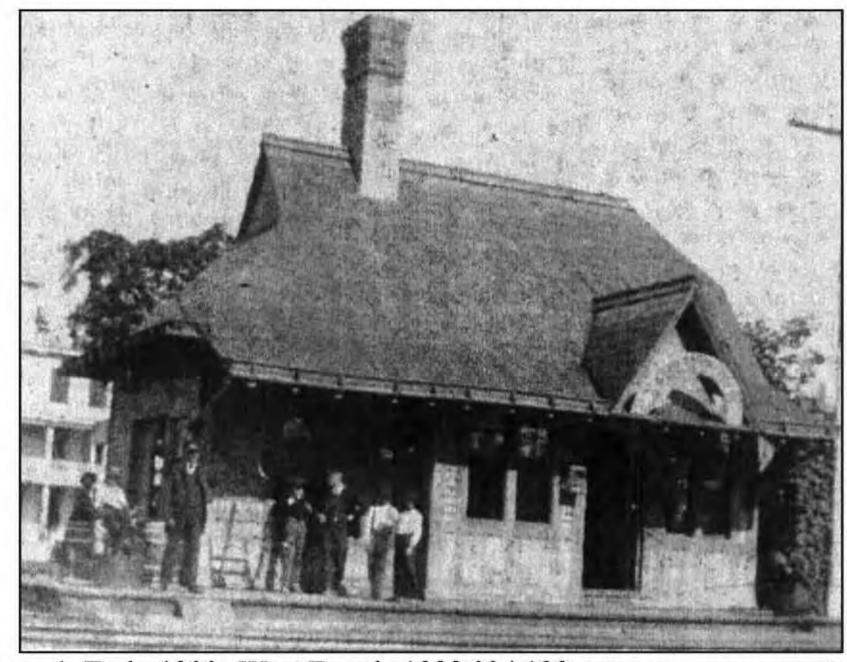


1. Early 1900s West Facade 1988.034.129 (Yorktown Museum # 1988.034.129)




2. Early 1900s North Facade (Yorktown Museum # 2002.52.1)



3. Early 1900s Southeast View (Yorktown Museum # L2005.027.006)

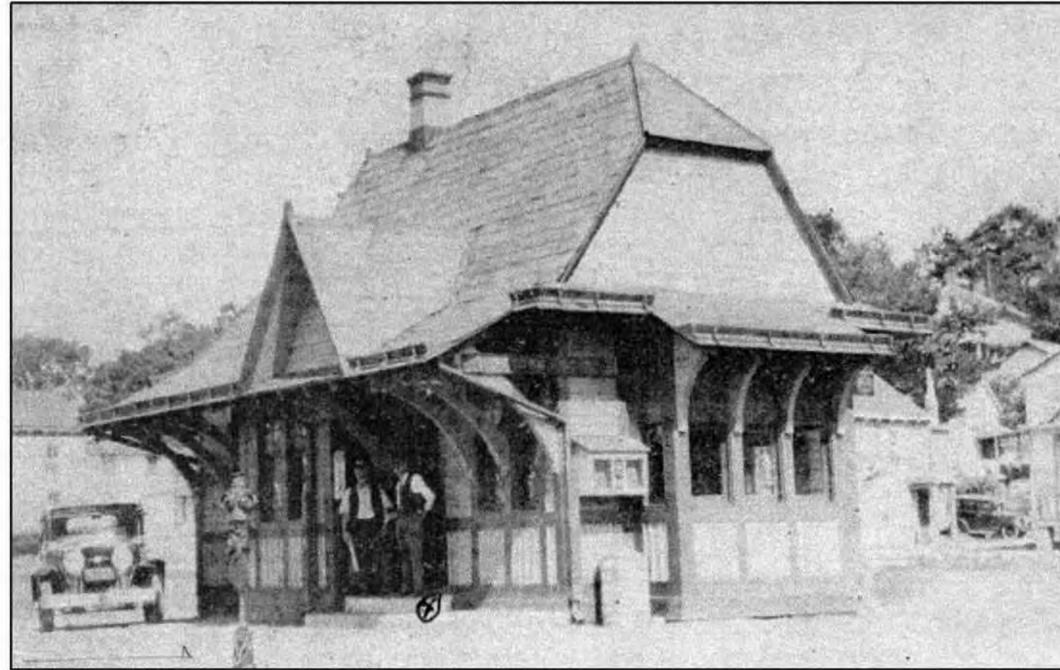

4. c. 1930 Southwest View (Yorktown Museum # L2005.027.004)

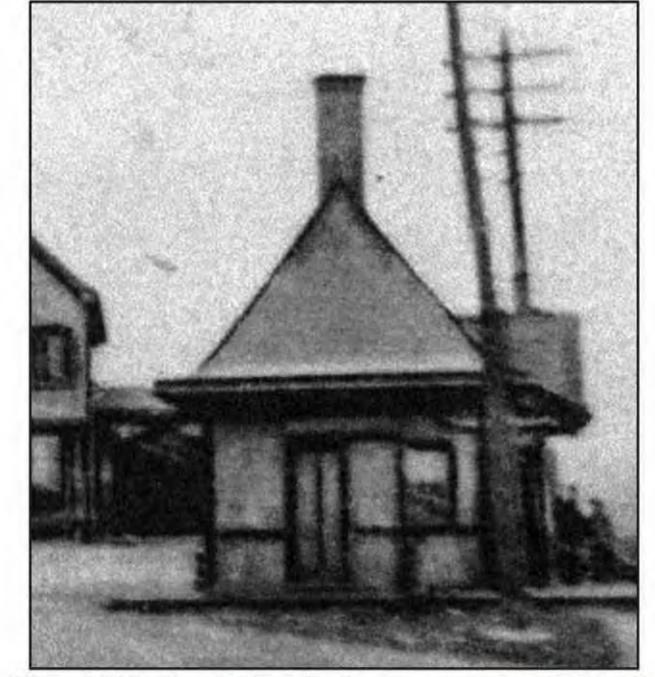


5. Circa 1920s North Facade (Yorktown Museum # 1986.059.059) 6. Eave and Gutter Detail (Yorktown Museum # A 73-9-1)




7. 1949 Southwest View (Yorktown Museum # 1984.008.063a)




8. "Station Master" Stove, Peekskill Museum

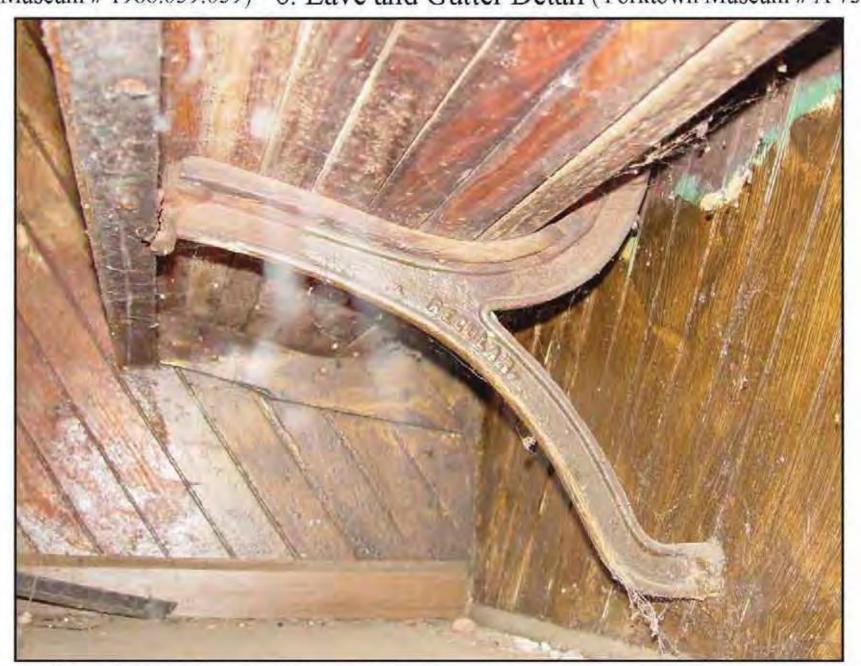

9. Bench Bracket (Exisiting 2007)

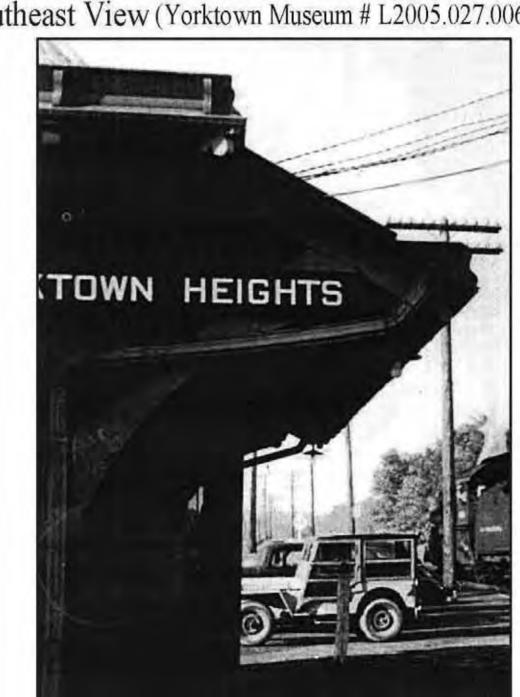

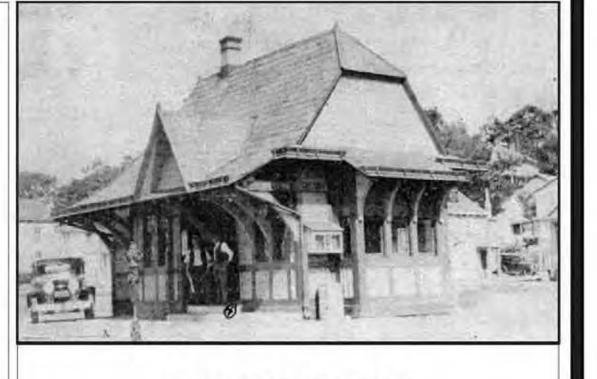

TOWN OF YORKTOWN

Railroad Station Park Yorktown Heights, New York

> Restoration of Yorktown Heights **Railroad Station**

Federal Aid Contract PIN 8780.26

ISSUED FOR BID

Issue/Revision	Date
ISSUED FOR REVIEW	08/02/07
ISSUED FOR REVIEW	08/17/07
ISSUED FOR BID	12/13/07
ISSUED FOR DEP/ SHPO	12/13/08
REVISED/ISSUED FOR REVIEW	4/21/09
REVISED/ISSUED FOR REVIEW 2	
ISSUED FOR BID	04/02/18

May 31, 2006



SEAL/ SIGNATURE


WSA Project No.

9901.01

Sheet Title

Historic Photos

Drawing No.

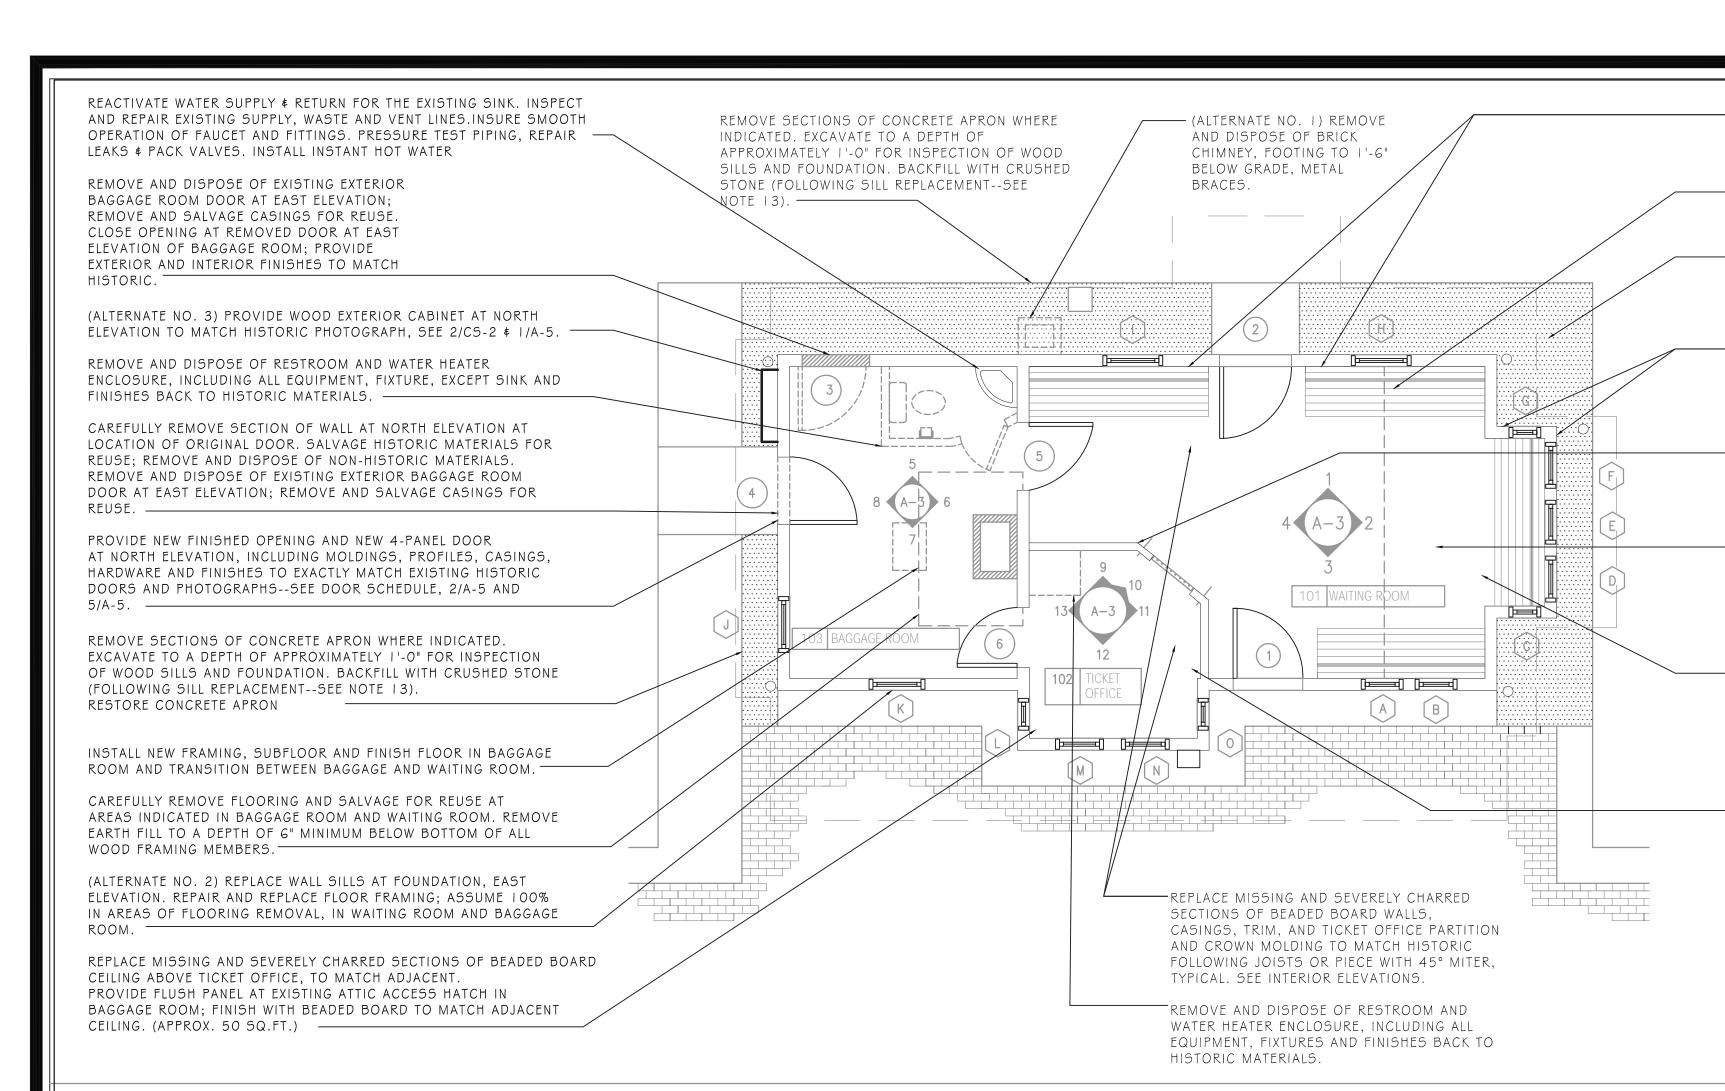

PROVIDE SIX (6) CAST SUPPORT BRACKETS FOR THREE NEW WALL-HUNG BENCHES, TO EXACTLY MATCH BRACKETS AT ONE (1) EXISTING BENCH; TWO (2) BRACKETS REQUIRED FOR EACH BENCH -- SEE 9/A-5.

PROVIDE NEW WALL-HUNG, WOOD SLAT BENCHES TO MATCH ONE EXISTING BENCH, TYPICAL AT THREE (3)

REMOVE SECTIONS OF CONCRETE APRON INDICATED. EXCAVATE TO A DEPTH OF APPROXIMATELY 1'-0" FOR INSPECTION OF WOOD SILLS AND FOUNDATION. BACKFILL WITH CRUSHED STONE FOLLOWING SILL REPLACEMENT, TYP.

(ALTERNATE NO. 2) REPLACE WALL SILLS AT FOUNDATION, EAST ELEVATION. REPAIR AND REPLACE FLOOR FRAMING: ASSUME 100% IN AREAS OF FLOORING REMOVAL, IN WAITING ROOM AND BAGGAGE

REMOVE AND DISPOSE OF CHARRED BEADED WALL AND CEILING BOARD, CASINGS AND TRIM: DO NOT REMOVE MATERIALS BEYOND SCOPE INDICATED WITHOUT ARCHITECT'S PRIOR APPROVAL.

- CAREFULLY REMOVE FLOORING AND SALVAGE FOR REUSE AT AREAS INDICATED IN BAGGAGE ROOM AND WAITING ROOM. REMOVE EARTH FILL TO A DEPTH OF 6" MINIMUM BELOW BOTTOM OF ALL WOOD FRAMING

RESTORE HISTORIC "STATION MASTER" STOVE; USE RESTORED HISTORIC STOVE AS MODEL FOR MISSING AND DAMAGED ELEMENTS. PROVIDE STOVE PIPE FROM STOVE TO ORIGINAL FLUE LOCATION -- SEE PHOTO

REMOVE AND DISPOSE OF TEMPORARY FLOORING AT FIRE LOCATION IN TICKET OFFICE. REMOVE EARTH FILL TO A DEPTH OF 6" MINIMUM BELOW BOTTOM OF ALL WOOD FRAMING MEMBERS. REPLACE MISSING AND SEVERELY CHARRED AREA OF FLOORING IN TICKET OFFICE TO MATCH ADJACENT 8" WIDE FLOOR BOARDS.

GENERAL NOTES:

REMOVE AND DISPOSE OF CHARRED BEADED WALL AND CEILING BOARD, CASINGS AND TRIM; DO NOT REMOVE MATERIALS BEYOND SCOPE INDICATED WITHOUT ARCHITECT'S PRIOR APPROVAL. SEE INTERIOR ELEVATIONS. (TYP.)

REPLACE AND REPAIR MISSING AND DAMAGED SECTIONS OF EXTERIOR WOODWORK, INCLUDING VERTICAL BOARDS, BATTENS, CLAPBOARD, BOTTOM SECTIONS OF FRAMING MEMBERS, AND SECTION OF EAVE BRACKETS; EXACTLY MATCH HISTORIC PROFILES AND MATERIALS. (TYP.)

RESTORE AND REGLAZE EXISTING WOOD WINDOWS AND DOORS; PROVIDE MISSING SECTIONS OF MOLDING, SASH, MULLIONS, CASINGS, AND HARDWARE TO MATCH HISTORIC, UTILIZING SALVAGED ELEMENTS WHEREVER POSSIBLE. PROVIDE NEW DOOR AND WINDOWS TO REPLACE SEVERELY DAMAGED OR MISSING UNITS; PROFILES, ELEMENTS, MATERIALS AND HARDWARE TO MATCH HISTORIC--SEE DOOR AND WINDOW SCHEDULES, A-6. (TYP.)

ALTERNATE NO. I PROVIDE TEST PITS AT ORIGINAL CHIMNEY FOOTING, CENTER

OF BAGGAGE ROOM: PROVIDE STAMPED AND SIGNED STRUCTURAL ASSESSMENT OF LOADING CAPACITY BY LICENSED ENGINEER.

PROVIDE STAMPED AND SIGNED STRUCTURAL SPECIFICATIONS FOR REPAIR OF FOOTING, IF NECESSARY; [UNIT PRICE NO. 1] REPAIR, REPOINT, UNDERPIN AND BACKFILL WITH SUITABLE MATERIAL, AS RECOMMENDED BY ENGINEER.

RECONSTRUCT CHIMNEY IN ORIGINAL LOCATION. UTILIZING SALVAGED BRICK, WITH COURSING AND PROFILE TO MATCH HISTORIC PHOTOGRAPHS -- SEE DETAIL 3/A-4, AND PHOTOS I/A-5 AND 2/A-5. ACCOMMODATE OFFSET OF FOOTING AND FRAMED OPENING AT ROOF.


PROVIDE 8" X 12" CAST IRON CLEANOUT DOOR.


ALTERNATE NO.2 REPLACE WALL SILLS AT FOUNDATION, EAST ELEVATION.

REPAIR AND REPLACE FLOOR FRAMING: ASSUME 100% IN AREAS OF FLOORING REMOVAL, IN WAITING ROOM AND BAGGAGE ROOM.

PROVIDE WOOD EXTERIOR CABINET AT NORTH ELEVATION TO MATCH HISTORIC PHOTOGRAPH - 2/CS-2 & DETAILS - 1/A-5.

ALTERNATE NO.4 PROVIDE DRY PIPE FIRE PROTECTION SYSTEM, WITH COMPRESSOR, DRY PENDANT SPRINKLER HEADS, PRE-ACTION OPERATION ACTIVATED BY SMOKE DETECTORS. PROVIDE DESIGN AND ENGINEERING CALCULATIONS BY LICENSED ENGINEER. PROVIDE NEW 2" INCOMING WATER SERVICE OR BOOSTER PUMP, IF REQUIRED TO PROVIDE ADEQUATE WATER



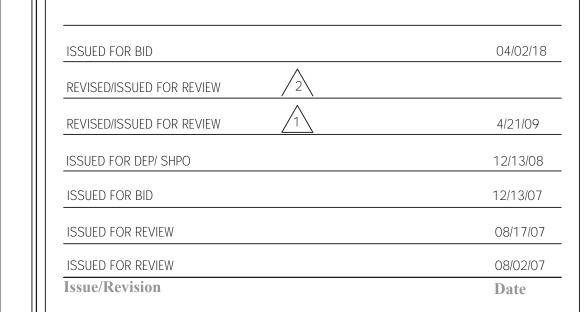

TOWN OF

YORKTOWN

Railroad Station Park

Yorktown Heights, New York

Restoration of

Yorktown Heights


Railroad Station

Federal Aid Contract

PIN 8780.26

ISSUED FOR BID

Date May 31, 2006

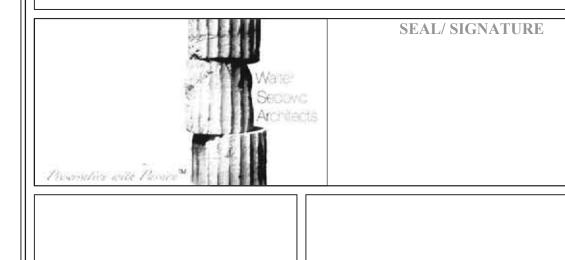

WSA Project No.

Sheet Title


9901.01

Drawing No.

A-I

Demolition, Floor, & Roof Plans



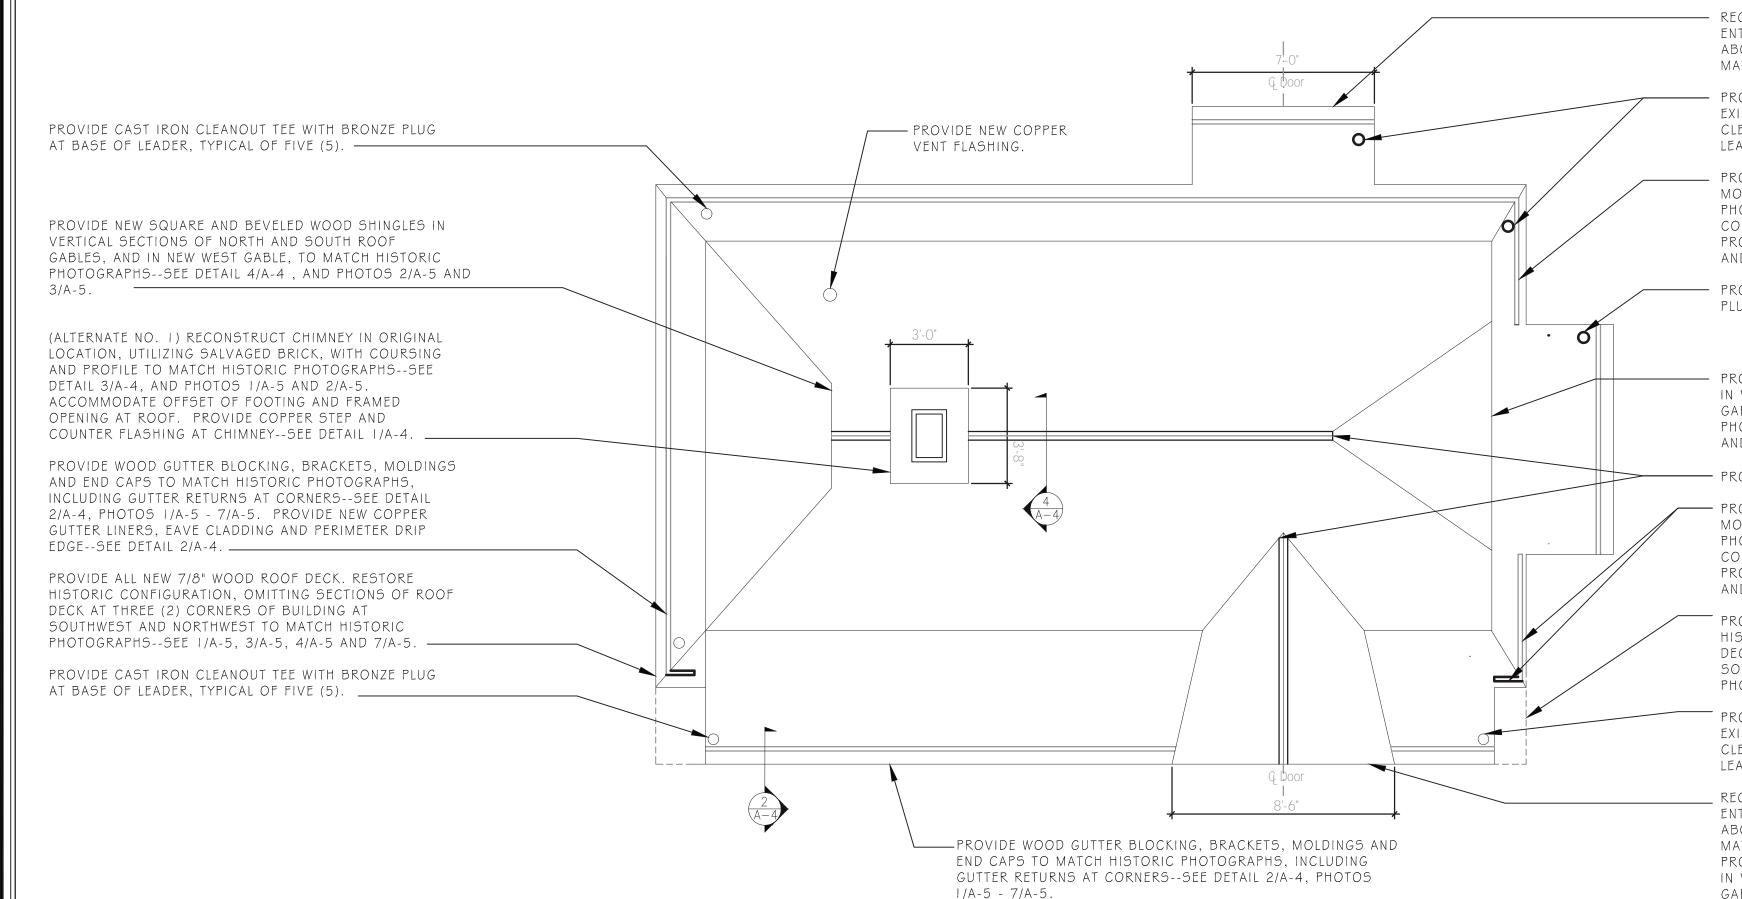

PROVIDE NEW COPPER GUTTER LINERS, EAVE CLADDING AND

PERIMETER DRIP EDGE--SEE DETAIL 2/A-4. (TYP.)

RECONSTRUCT HISTORIC GABLE ABOVE WAITING ROOM ENTRY, WEST ELEVATION, AND HISTORIC SHED ROOF ABOVE WAITING ROOM ENTRY, EAST ELEVATION, TO MATCH HISTORIC PHOTOGRAPHS -- SEE 1/A-5 - 5/A-5.

PROVIDE NEW COPPER DOWNSPOUT TO MATCH EXISTING, TYPICAL OF ONE (3). PROVIDE CAST IRON CLEANOUT TEE WITH BRONZE PLUG AT BASE OF LEADER, TYPICAL OF FIVE (5).

PROVIDE WOOD GUTTER BLOCKING, BRACKETS, MOLDINGS AND END CAPS TO MATCH HISTORIC PHOTOGRAPHS, INCLUDING GUTTER RETURNS AT CORNERS--SEE DETAIL 2/A-4, PHOTOS 1/A-5 - 7/A-5. PROVIDE NEW COPPER GUTTER LINERS, EAVE CLADDING AND PERIMETER DRIP EDGE--SEE DETAIL 2/A-4.

PROVIDE CAST IRON CLEANOUT TEE WITH BRONZE PLUG AT BASE OF LEADER, TYPICAL OF FIVE (5).

PROVIDE NEW SQUARE AND BEVELED WOOD SHINGLES IN VERTICAL SECTIONS OF NORTH AND SOUTH ROOF GABLES, AND IN NEW WEST GABLE, TO MATCH HISTORIC PHOTOGRAPHS--SEE DETAIL 4/A-4, AND PHOTOS 2/A-5 AND 3/A-5.

- PROVIDE NEW COPPER RIDGES--SEE DETAIL 4/A-4.

- PROVIDE WOOD GUTTER BLOCKING, BRACKETS, MOLDINGS AND END CAPS TO MATCH HISTORIC PHOTOGRAPHS, INCLUDING GUTTER RETURNS AT CORNERS--SEE DETAIL 2/A-4, PHOTOS 1/A-5 - 7/A-5. PROVIDE NEW COPPER GUTTER LINERS, EAVE CLADDING AND PERIMETER DRIP EDGE--SEE DETAIL 2/A-4.

PROVIDE ALL NEW 7/8" WOOD ROOF DECK. RESTORE HISTORIC CONFIGURATION, OMITTING SECTIONS OF ROOF DECK AT THREE (2) CORNERS OF BUILDING AT SOUTHWEST AND NORTHWEST TO MATCH HISTORIC PHOTOGRAPHS--SEE 1/A-5, 3/A-5, 4/A-5 AND 7/A-5.

PROVIDE NEW COPPER DOWNSPOUT TO MATCH EXISTING, TYPICAL OF ONE (3). PROVIDE CAST IRON CLEANOUT TEE WITH BRONZE PLUG AT BASE OF LEADER, TYPICAL OF FIVE (5).

RECONSTRUCT HISTORIC GABLE ABOVE WAITING ROOM ENTRY, WEST ELEVATION, AND HISTORIC SHED ROOF ABOVE WAITING ROOM ENTRY, EAST ELEVATION, TO MATCH HISTORIC PHOTOGRAPHS -- SEE 1/A-5 - 5/A-5. PROVIDE NEW SQUARE AND BEVELED WOOD SHINGLES IN VERTICAL SECTIONS OF NORTH AND SOUTH ROOF GABLES, AND IN NEW WEST GABLE, TO MATCH HISTORIC PHOTOGRAPHS--SEE DETAIL 4/A-4, AND PHOTOS 2/A-5 AND 3/A-5.

GENERAL NOTES

REMOVE AND DISPOSE OF ROOFING AND GUTTER SYSTEMS, INCLUDING COMPOSITION SHINGLES, SHEET METAL, WOODWORK, UNDERLAYMENT AND WOOD DECK. SALVAGE SOUND GUTTER BRACKETS, END CAPS AND FRAMING FOR REUSE. (TYP.)

PROVIDE ALL NEW 7/8" WOOD ROOF DECK. RESTORE HISTORIC CONFIGURATION, OMITTING SECTIONS OF ROOF DECK AT TWO (2) CORNERS OF BUILDING, AT SOUTHWEST AND NORTHWEST, TO MATCH HISTORIC PHOTOGRAPHS -- SEE 1/A-5, 3/A-5, 4/A-5 AND 7/A-5. (TYP.)

PROVIDE WOOD GUTTER BLOCKING, BRACKETS, MOLDINGS AND END CAPS TO MATCH HISTORIC PHOTOGRAPHS, INCLUDING GUTTER RETURNS AT CORNERS--SEE DETAIL 2/A-4, PHOTOS I/A-5 - 7/A-5. (TYP.)

PROVIDE NEW SLATE ROOF WITH MITERED HIPS AND CLOSED VALLEYS. PROVIDE 30# FELT; PROVIDE ICE & WATER SHIELD AT EAVES, VALLEYS, HIPS, RIDGES AND VERTICAL WALLS, AND CONTINUOUS FROM EAVE TO 2'-O" FT ABOVE THE CHANGE IN ROOF SLOPE. (SEE NOTE 17 FOR WOOD SHINGLES IN VERTICAL SECTIONS OF NORTH AND SOUTH GABLES.) (TYP.)

PROVIDE NEW COPPER GUTTER LINERS, EAVE CLADDING AND PERIMETER DRIP EDGE--SEE DETAIL 2/A-4. (TYP.)

PROVIDE 6" COTTON BATT INSULATION ABOVE CEILING IN ATTIC. (TYP.)

PLOT PLAN SEE CS-I


©2017 Walter Sedovic Architects


Roof Plan


Notes 3, 15, 16, 26, 27, 33 Typical

Floor Plan

1/4"=1'-0"

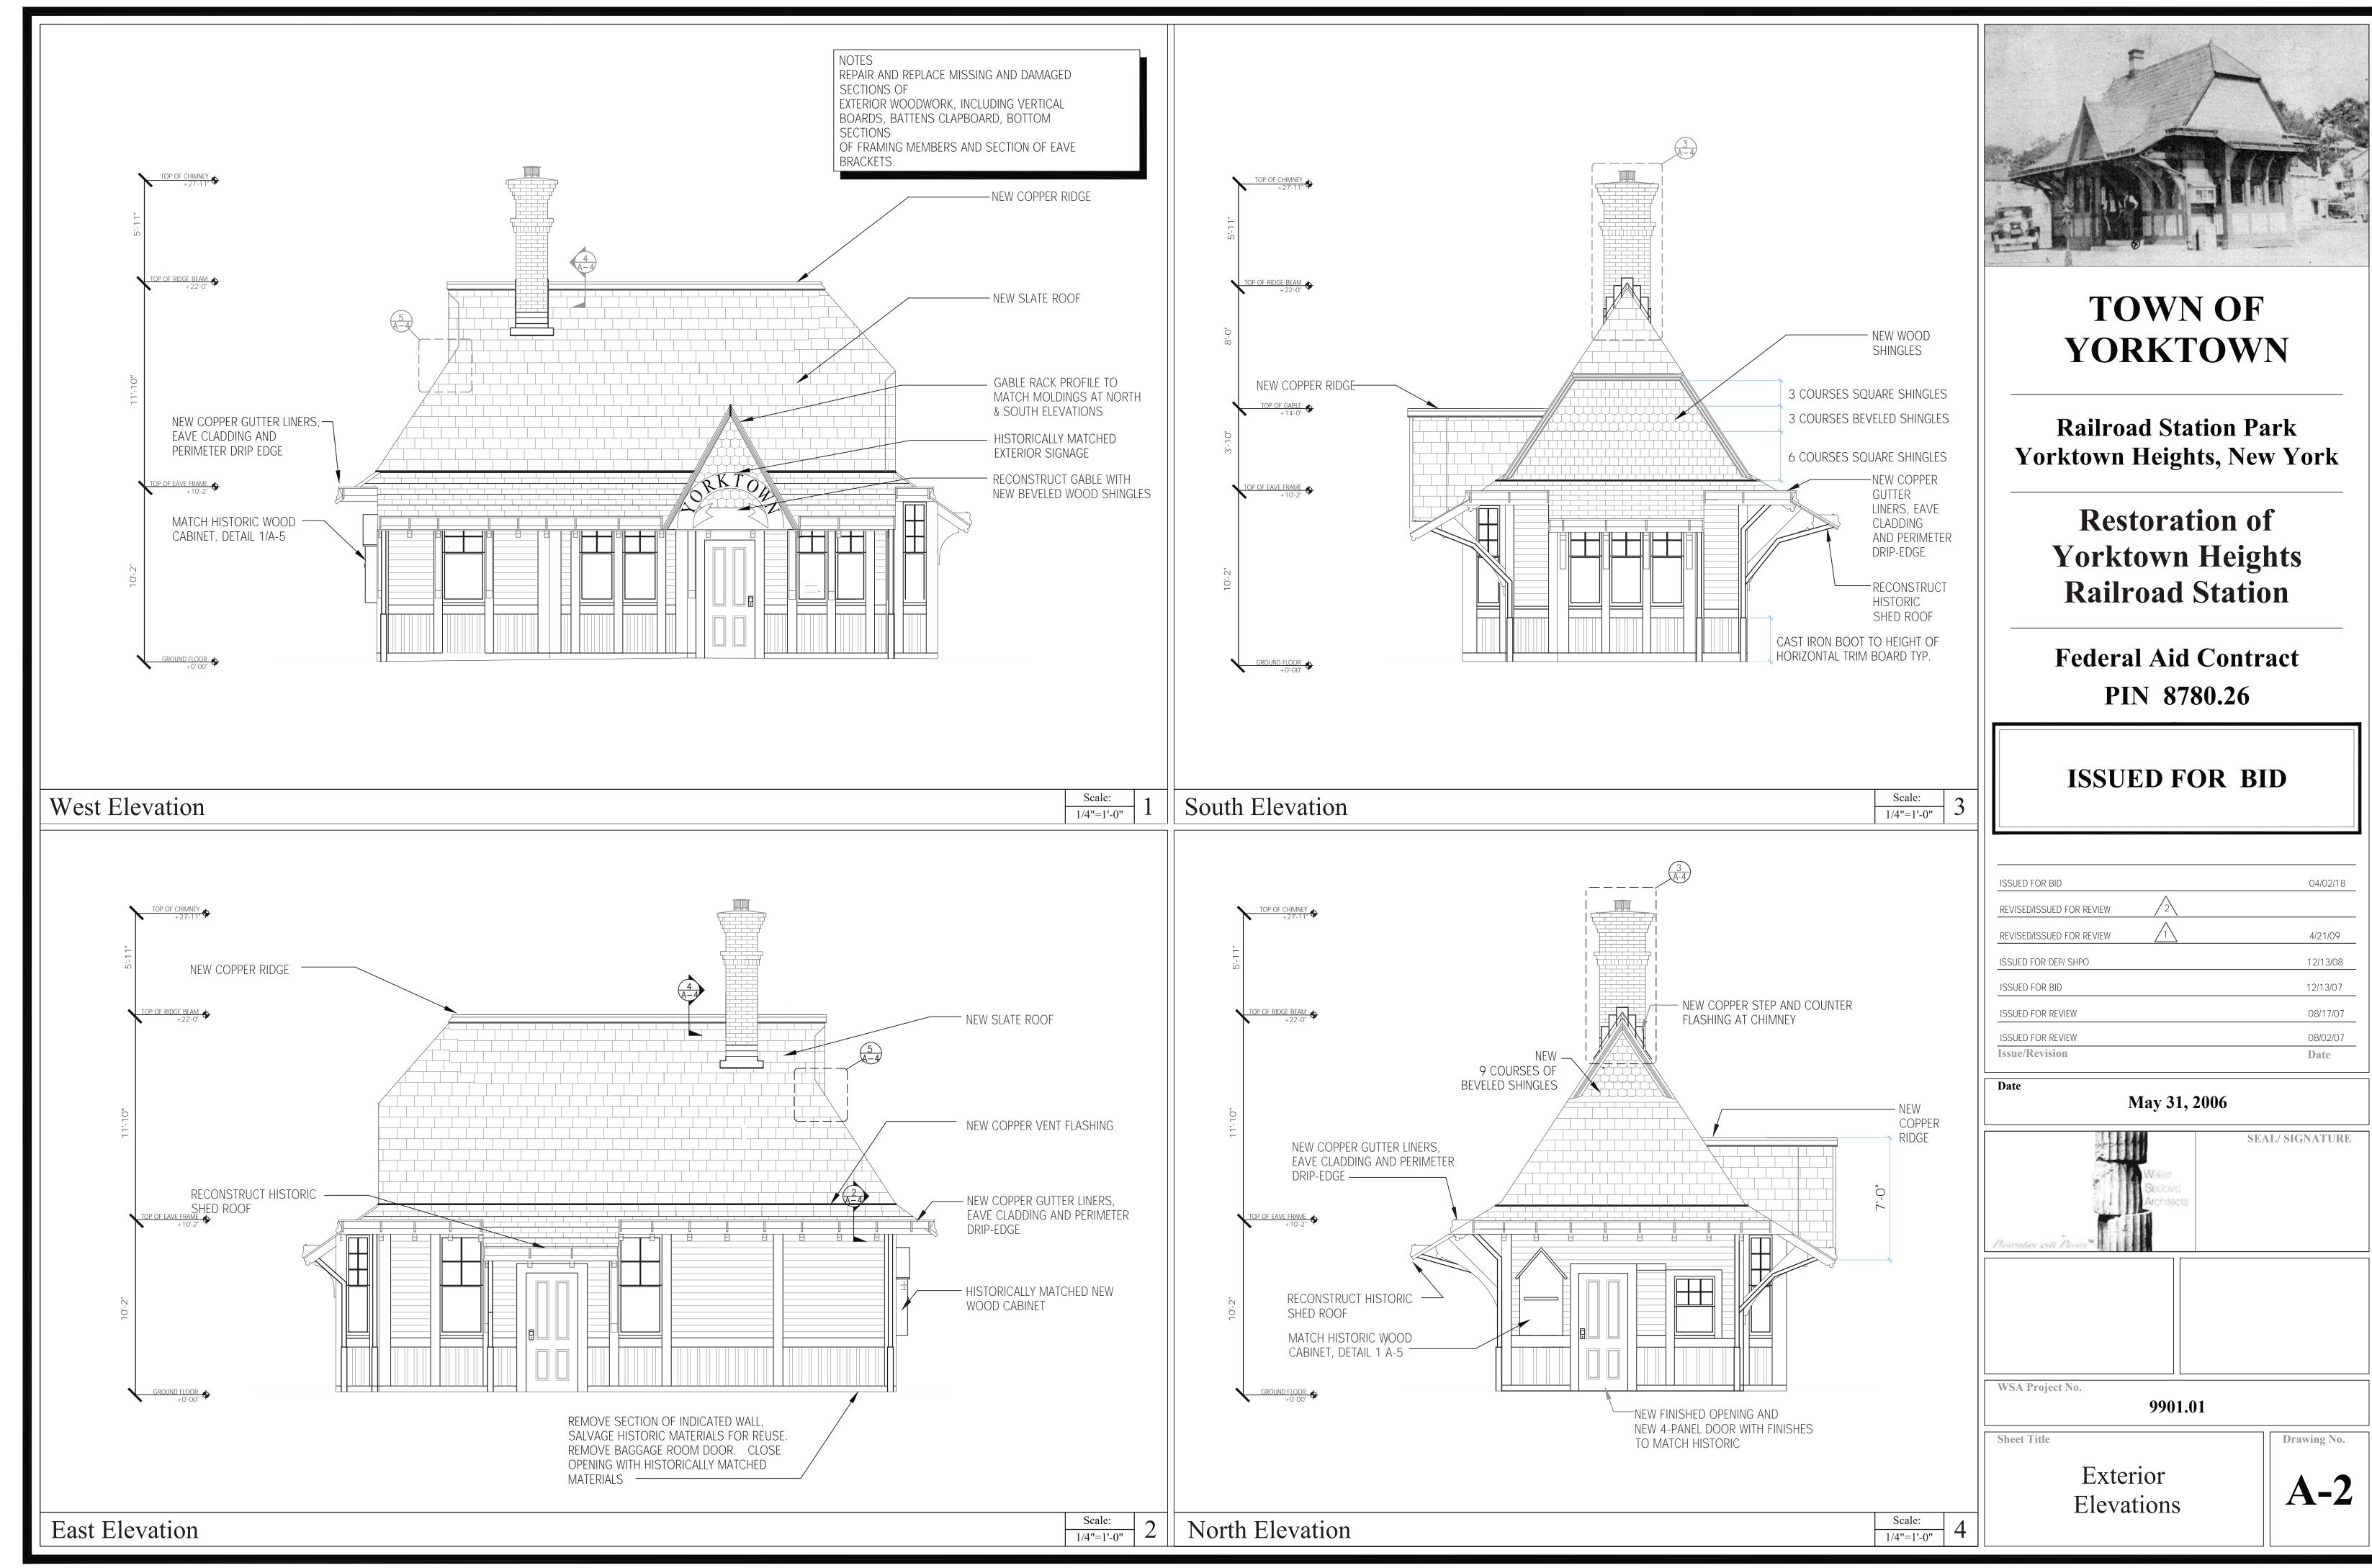

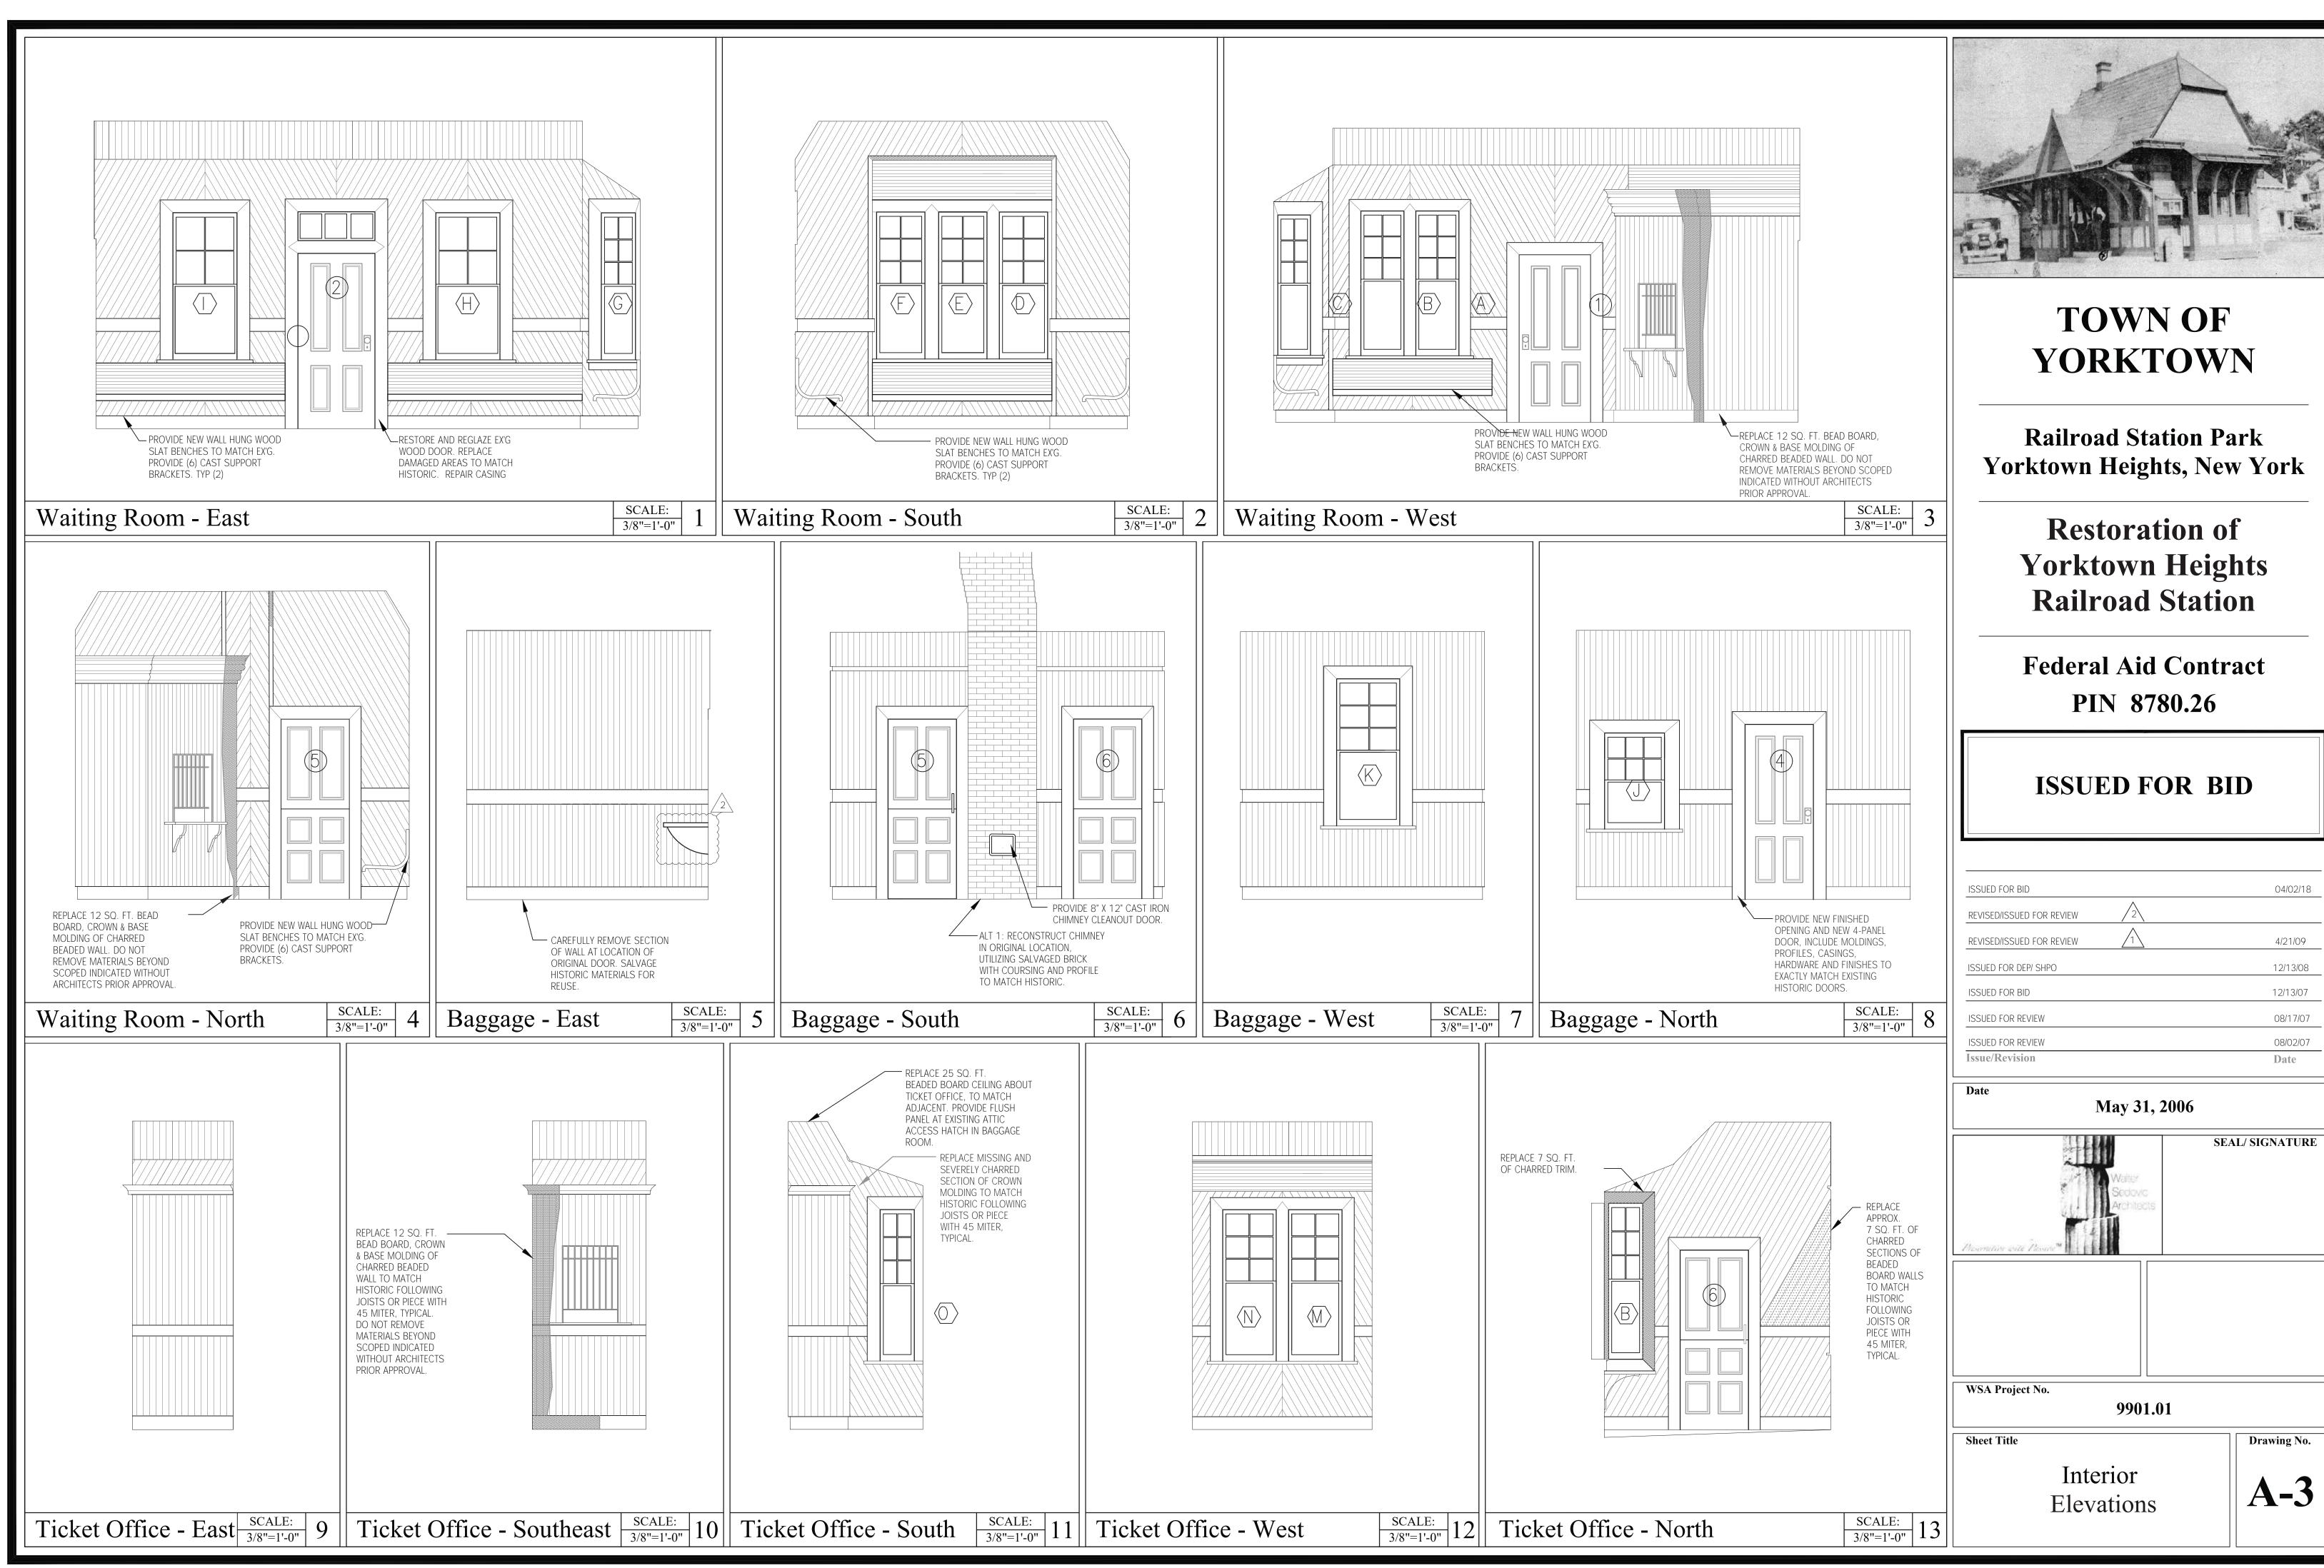

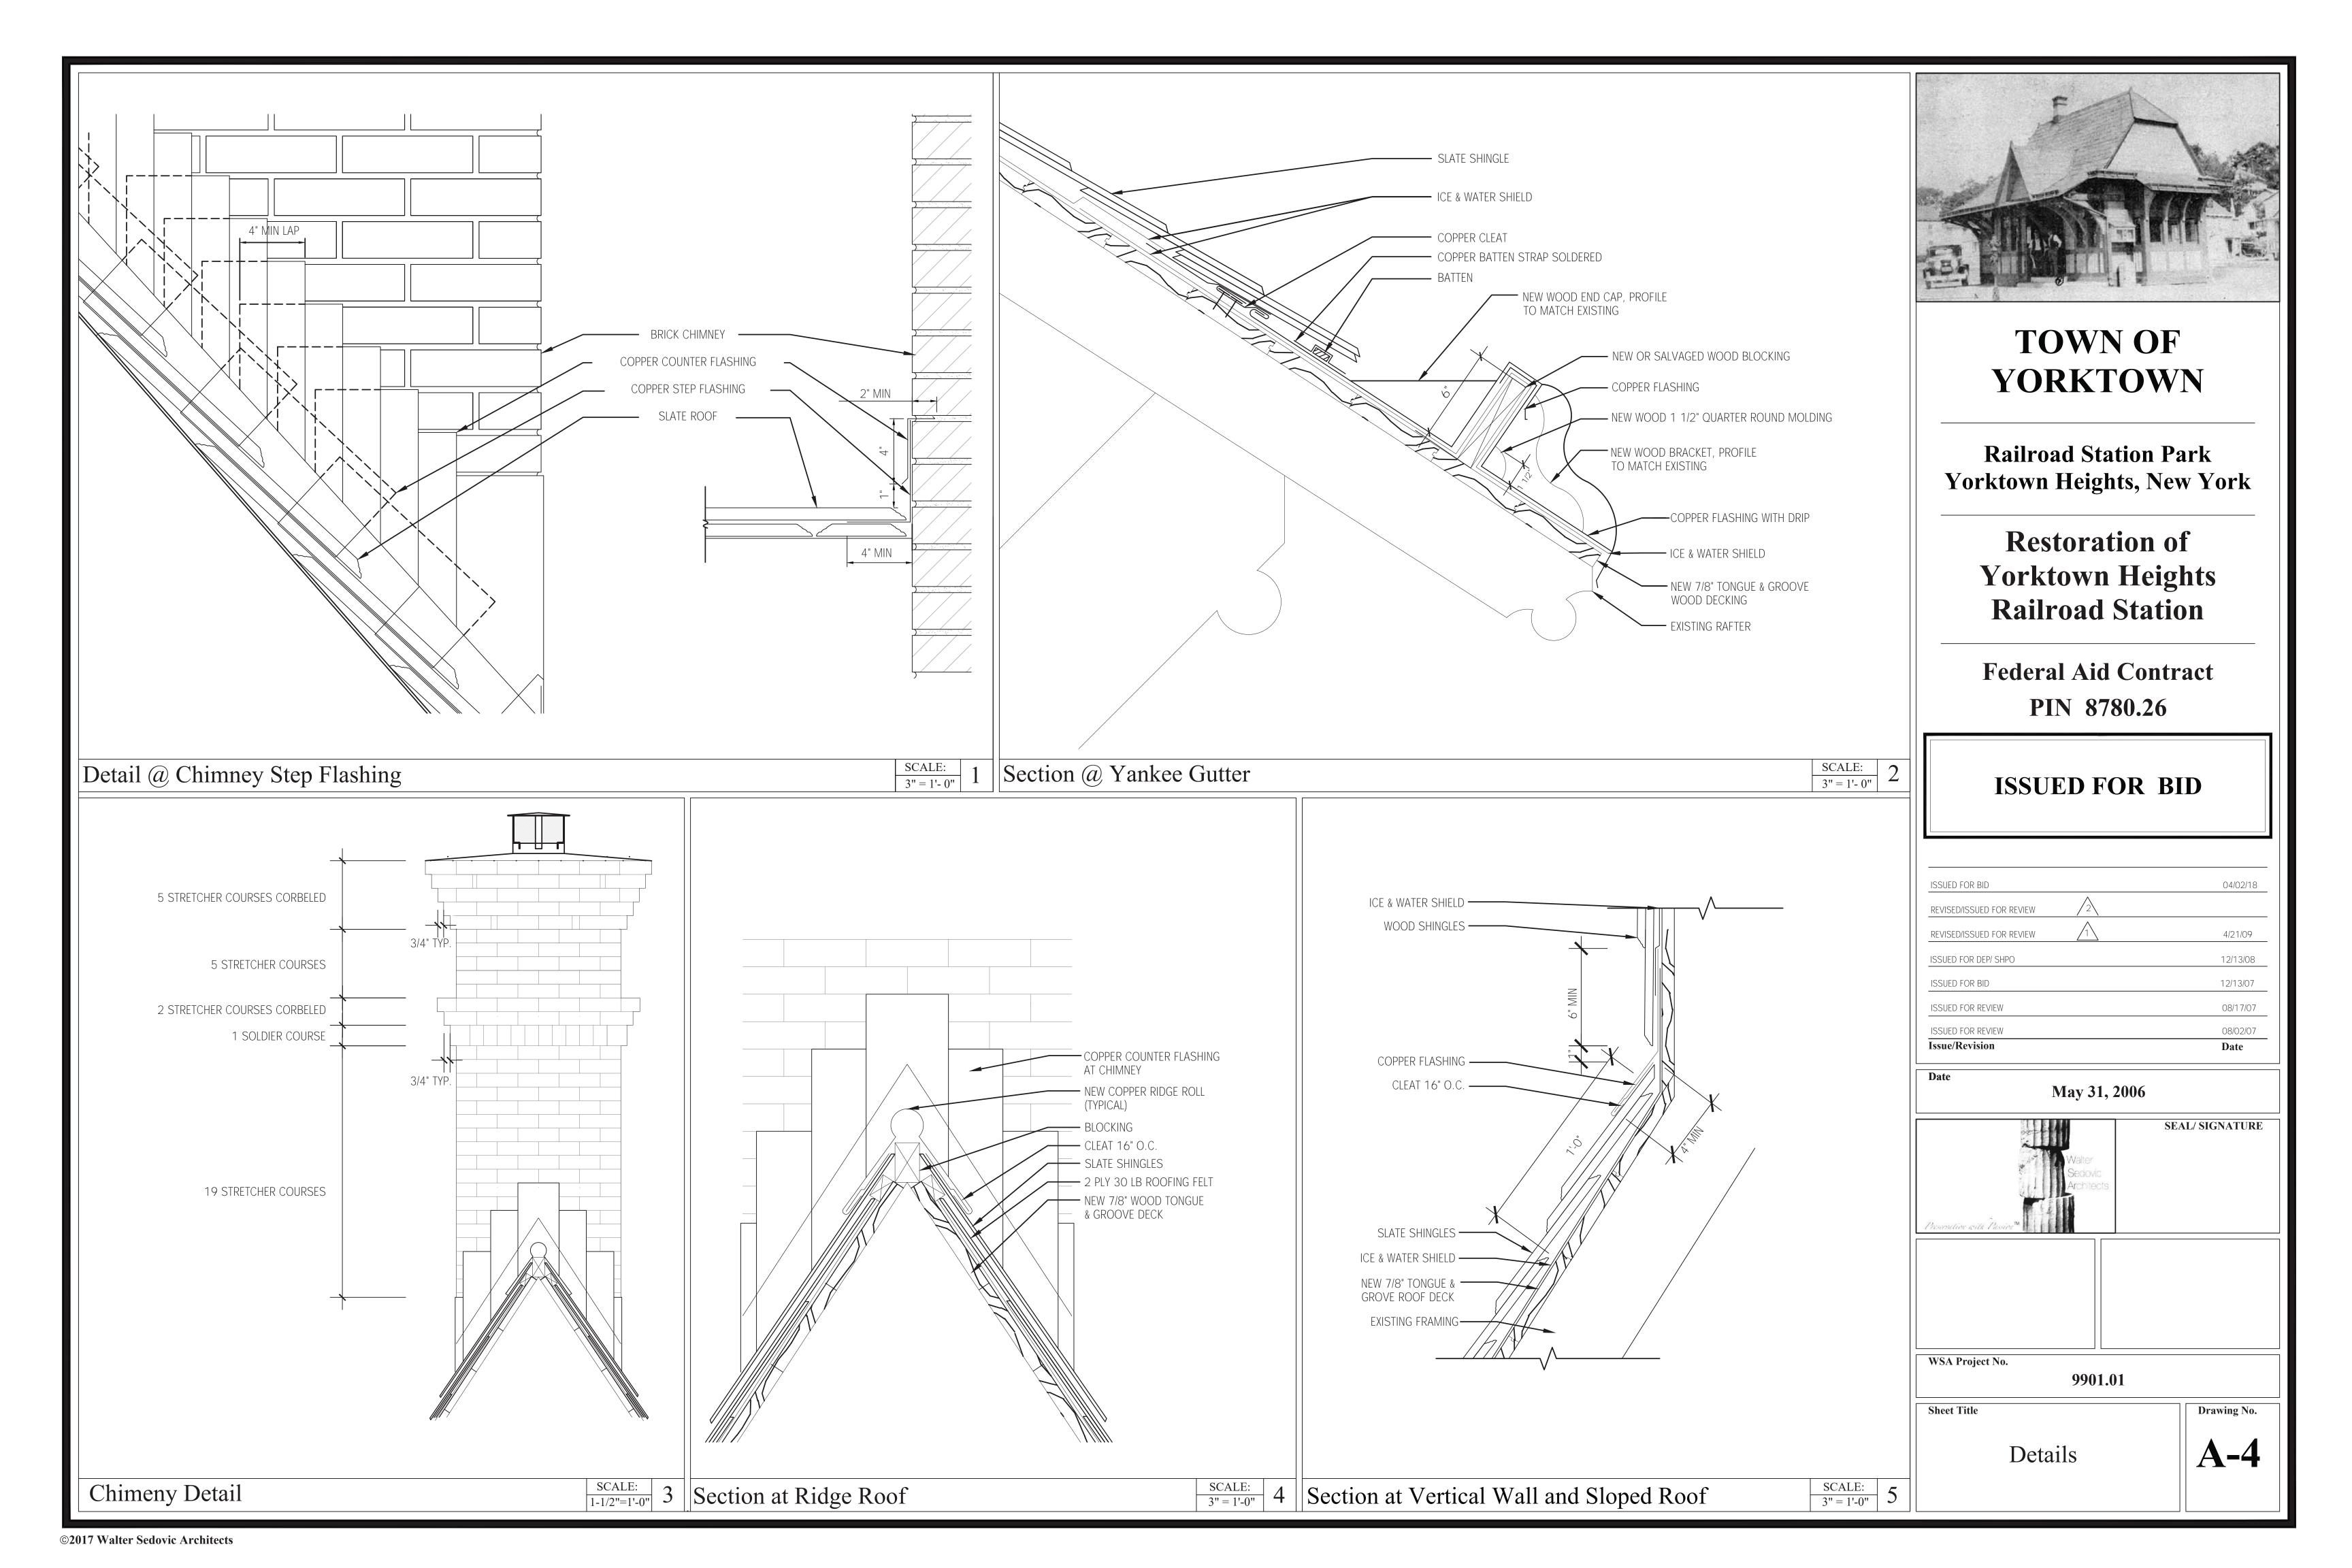

WINDOW	SCHEDU	JLE				
NUMBER	WIDTH	HEIGHT	TYPE	HARDWARE	EXISTING/NEW	COMMENTS
А	1'-9"	5'-10"	1	SEE NOTE 3	EXISTING	
В	1'-9"	5'-10"	1	SEE NOTE 3	EXISTING	
С	1'-4"	5'-10"	2	SEE NOTE 3	EXISTING	
D	1'-11"	5'-10"	3	SEE NOTE 3	EXISTING	
E	1'-11"	5'-10"	3	SEE NOTE 3	EXISTING	
F	1'-11"	5'-10"	3	SEE NOTE 3	EXISTING	
G	1'-4"	5'-10"	2	SEE NOTE 3	EXISTING	
Н	2'-6"	5'-10"	4	SEE NOTE 3	EXISTING	NEW LOWER SASH
	2'-6"	5'-10"	4	SEE NOTE 3	EXISTING	
J	2'-4"	5'-10"	5	SEE NOTE 3	EXISTING	
K	2'-5"	5'-10"	6	SEE NOTE 3	EXISTING	
L	1'-4"	5'-10"	2	SEE NOTE 3	EXISTING	
M	2'-0"	5'-10"	7	SEE NOTE 3	NEW	REUSE SALVAGED ELEMENTS OF EXISTING WINDOW, REBUILD SASH
N	2'-0"	5'-10"	7	SEE NOTE 3	NEW	REUSE SALVAGED ELEMENTS OF EXISTING WINDOW, REBUILD SASH
0	1'-4"	5'-10"	2	SEE NOTE 3	NEW	REUSE SALVAGED ELEMENTS OF EXISTING WINDOW
P	1'-1 1/2"	3'-0"	8-TRANSOM	SEE NOTE 3	EXISTING	NEW VERTICAL MULLIONS (2)


- 1. DIMENSIONS ARE APPROXIMATE, FOR REFERENCE ONLY. VERIFY ALL DIMENSIONS IN FIELD.
- 3. CLEAN, REPAIR, AND REUSE SASH WEIGHTS AND HARDWARE; PROVIDE NEW WHERE MISSING, TO MATCH EXISTING. PROVIDE NEW SASH CORD AND FULL PERIMETER WEATHER STRIPPING AT ALL OPERABLE WINDOWS, TYPICAL. SEE SPECIFICATION SECTION 08 5200.

DOOR	SCHED	ULE				
NUMBER	WIDTH	HEIGHT	TYPE	HARDWARE	EXISTING/NEW	COMMENTS
1	2'-11"	6'-10"	А	PROVIDE NEW LOCK SET, MIDDLE HINGE, ROSE	EXISTING	REBUILD BOOR, NEW UPPER AND LOWER STYLES, REPLACE 4 PANELS
2	3'-0"	6'-10"	В	PROVIDE NEW LOCK SET	EXISTING	RESTORE DOOR, REPLACE MISSING & DETERIORATED CASING AND REPLACE 4 PANELS
3	-	-	-		-	REMOVE & DISPOSE OF DOOR, CLOSE OPENING; SEE GENERAL NOTES 4 & 19
4	2'-8"	6'-10"	С	PROVIDE NEW TO MATCH DOORS 1 AND 2	NEW	
5	2'-6"	6'-10 1/4"	D-DUTCH		EXISTING	REINSTALL LOWER PORTION OF THE DOOR
6	2'-6"	6'-10 1/4"	D-DUTCH		EXISTING	


DOOR NOTES:


- 1. DIMENSIONS ARE APPROXIMATE, FOR REFERENCE ONLY. VERIFY ALL DIMENSIONS IN FIELD.
 2. FOR RESTORATION AND FABRICATION OF WOOD DOORS, SEE SPECIFICATION SECTION 08 1400.


	EXTERIOR PAINT SCHEDULE						
	VO.	LOCATION	MANUFACTURER	NUMBER	BASE	FINISH	COMMENTS
F	P-1	FIELD	BENJAMIN MOORE PAINTS	841	1	-	-
F	P-2	TRIM	BENJAMIN MOORE PAINTS	1211	4	-	-

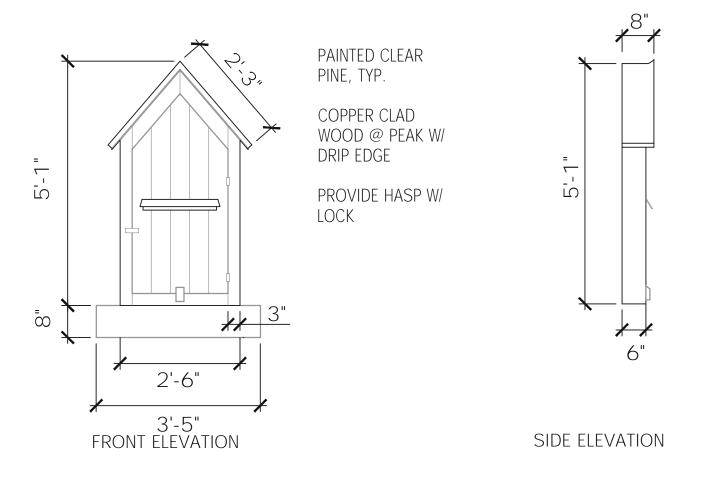



EXTERIOR CABINET, NORTH ELEVATION SCALE: 1/2" = 1'-0"

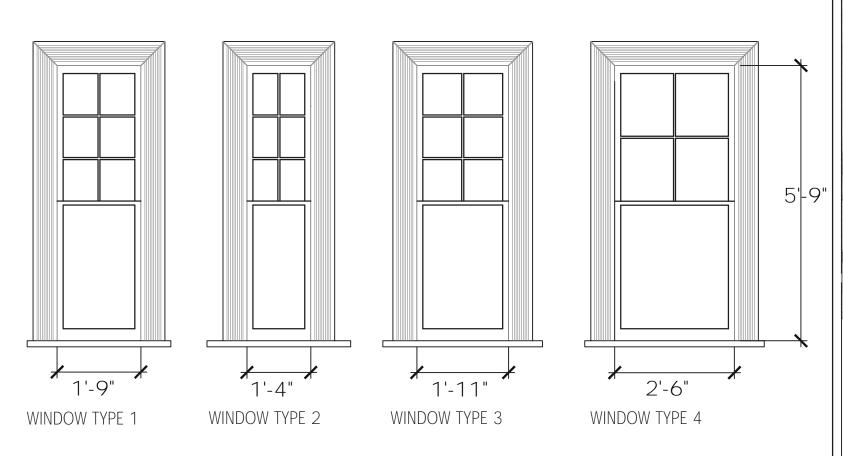


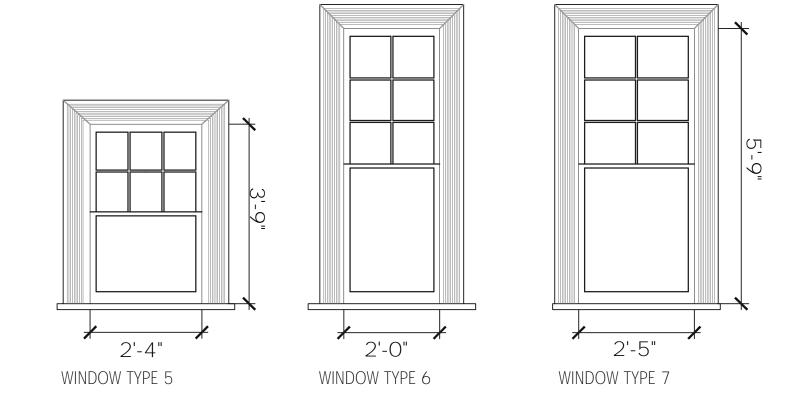

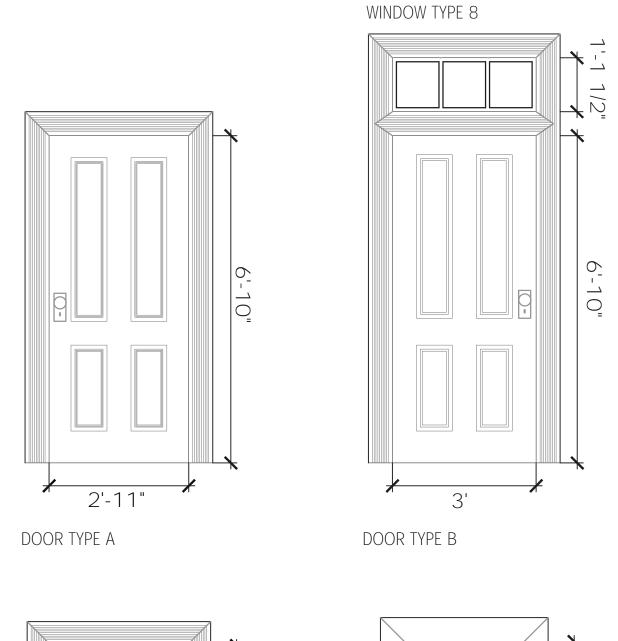

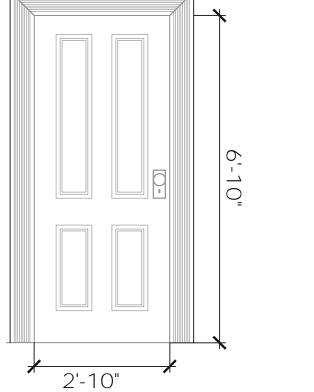

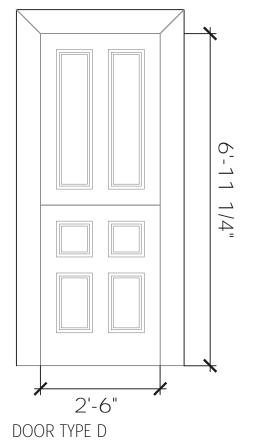

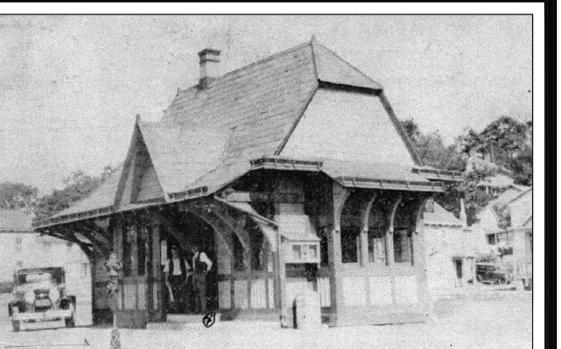

TOWN OF YORKTOWN

Railroad Station Park Yorktown Heights, New York

> Restoration of Yorktown Heights **Railroad Station**

Federal Aid Contract PIN 8780.26

ISSUED FOR BID

ISSUED FOR BID	04/02/1
REVISED/ISSUED FOR REVIEW 2	
REVISED/ISSUED FOR REVIEW 1	4/21/09
ISSUED FOR DEP/ SHPO	12/13/08
ISSUED FOR BID	12/13/07
ISSUED FOR REVIEW	08/17/0
ISSUED FOR REVIEW	08/02/0
Issue/Revision	Date

May 31, 2006 SEAL/ SIGNATURE WSA Project No.

9901.01

Schedules

Sheet Title

A-5

Drawing No.

ELECTRIC SYMBOL LEGEND

E EXISTING DEVICE LOCATION

QUAD OUTLET

DUPLEX OUTLET

GFI GFI OUTLET

Dedicated outlet

 ${f S}$ SWITCH

LIGHT FIXTURE A

- LIGHT FIXTURE B

- EMERGENCY LIGHT

EXIT SIGN

ELECTRICAL BASE BOARD HEAT

THERMOSTAT

EXHAUST FAN

ELECTRICAL, SIGNAL & LIGHTING

INSPECT AND REPAIR EXISTING ELECTRICAL SERVICE, PANEL AND

MIDING

2. REMOVE ALL WIRING AND EQUIPMENT NOT SPECIFICALLY SCHEDULED TO REMAIN.


3. PROVIDE NEW SWITCHES AND OUTLETS, BASEBOARD RADIANT HEAT, THERMOSTATS, EXHAUST FAN, LIGHTING FIXTURES AND TIME CLOCK --SEE


4. PROVIDE LIGHTNING PROTECTION SYSTEM, WITH UL LIGHTNING PROTECTION INSPECTION CERTIFICATE FOR CONFORMANCE WITH UL 96A.

5. PROVIDE CENTRAL STATION SECURITY, FIRE DETECTION AND ALARM SYSTEM--ASSUME TWO GLASS BREAK DETECTORS, THREE EXTERIOR DOOR CONTACTS, THREE SMOKE DETECTORS, HORN/STROBE, TWO PULL STATIONS, CONNECTION TO FIRE

Legend & Notes

Electric Plan

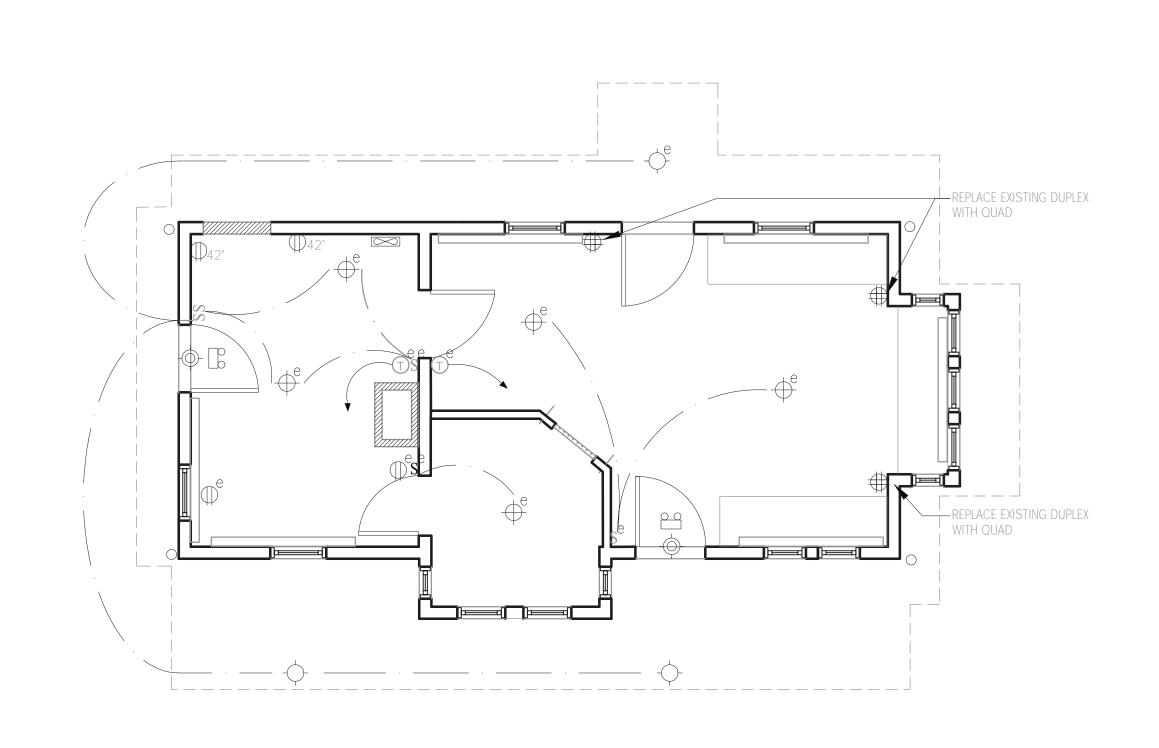

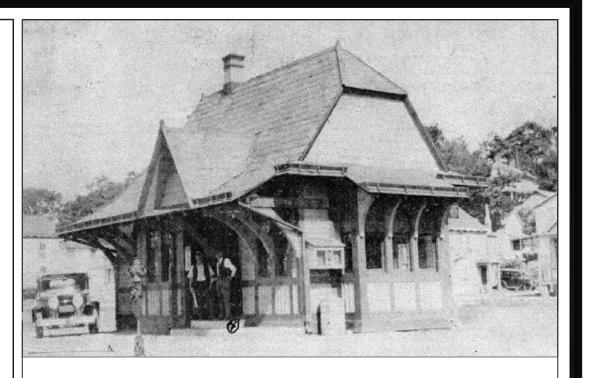

TOWN OF YORKTOWN

Railroad Station Park Yorktown Heights, New York


Restoration of Yorktown Heights Railroad Station

Federal Aid Contract PIN 8780.26

ISSUED FOR BID

ISSUED FOR BID	04/02/18
REVISED/ISSUED FOR REVIEW 2	
REVISED/ISSUED FOR REVIEW 1	4/21/09
ISSUED FOR DEP/ SHPO	12/13/08
ISSUED FOR BID	12/13/07
ISSUED FOR REVIEW	08/17/07
ISSUED FOR REVIEW	08/02/07
Issue/Revision	Date

May 31, 2006

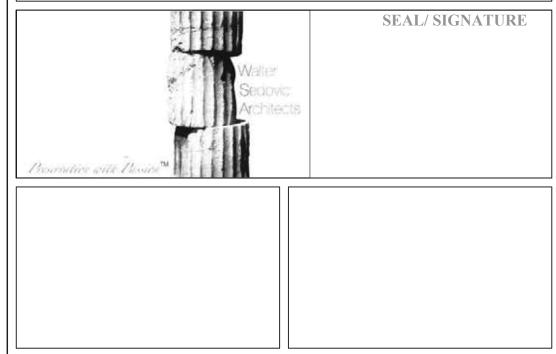

WSA Project No.

9901.01

Sheet Title

Scale: 1/4"=1'-0"

Electrical Plan and Details

E-1